

TracPhone® F77



Satellite Communications Wherever You Go

The premier high-powered Inmarsat Fleet satellite communications system



Key Features and Attributes

- Meets GMDSS standards for international regulatory compliance
- Pay-as-you-go plans so you only pay for what you use
- Two powerful options for Internet access: ISDN (per-minute charge) for high-bandwidth voice, video conferencing, and large file transmission; and MPDS (per-megabit charge) through which you only pay for the data you send and receive, not for the time you spend online
- Pole-to-Pole Global Mobile Packet Data Service (MPDS) allows “always on” Internet connections and cost-effective web surfing at speeds as high as 640 Kbps (up & down)
- Rely on Inmarsat airtime services provided by KVH that offer exclusive airtime benefits and a single point of contact for both hardware and airtime questions

TracPhone F77 – a powerful, global commercial-grade communications solution for virtually any vessel

The powerful TracPhone F77 marine satellite communications system provides access to Inmarsat Fleet’s Integrated Services Digital Network (ISDN) channel and Mobile Packet Data Service (MPDS) via Inmarsat’s global beams, ensuring uninterrupted voice, data, and fax service. Plus, you enjoy added flexibility thanks to the TracPhone F77’s compatibility with shipboard PABX systems as well as onboard networks (when connected to an IP router). Now up-to-date weather reports or maritime chart and navigational updates are available virtually anywhere you travel. In addition, the Inmarsat Fleet F77 service is designed to meet the International Maritime Organization’s (IMO) latest distress and safety specifications within the Global Maritime Distress and Safety System (GMDSS).




Technical Specifications

Service	Inmarsat Fleet	Transceiver Dimensions	5.5 (h) x 38 (w) x 16.4 (d) cm (2.2" x 15" x 6.5")
Voice	4.8 Kbps (<i>global beam</i>) 64 Kbps (<i>global beam</i>)	Transceiver Weight	2.6 kg (6 lbs)
Fax	Group 3 & 4 (<i>global beam</i>)	Handset Dimensions	20 (h) x 5 (w) x 3 (d) cm (7.9" x 2" x 1.2")
MPDS Standard	64 Kbps (<i>global beam</i>)	Handset Weight	0.25 kg (0.6 lbs)
ISDN 1 Standard	64 Kbps (<i>global beam</i>)	Cradle Dimensions	10 (h) x 14.5 (w) x 4 (d) cm (3.9" x 5.7" x 1.6")
ISDN 2 Standard	128 Kbps (<i>spot beam</i>)	Cradle Weight	0.25 kg (0.5 lbs)
Interfaces		Antenna Diameter	84 cm (33") – Standard ¹ 89 cm (35") – Matching
Async. Data:	MPDS: up & down 64 Kbps shared (128-320 Kbps), Serial EIA standard RS-232E, Built-in modem, max. 115.2 Kbps, DB-9 female connector	Antenna Height	89 cm (35") – Standard ¹ 99 cm (39") – Matching
Phone:	2-wire 600, standard DTMF telephones, RJ-11	Antenna Weight	26 kg (57 lbs) – Standard ¹ 34.9 kg (77 lbs) – Matching
Fax:	2-wire 600, Group 3 Fax, 9.6 Kbps, RJ-11, Group 4 compatible using ISDN channel	GMDSS Approved	Yes
Printer:	N/A	Matching TracVision® Dome	TracVision TV8
LAN Port:	RJ-45; MPDS: up & down 64 Kbps shared (128- 320 Kbps with compression) PPPoE	Type Qualified	64 Kbps (<i>global beam</i>)
EURO ISDN:	ISDN NT1 S/T bus, RJ-45 connector	Warranty	1 Year Parts, 1 Year Labor
Power:	22-31 VDC/10 amps (<i>floating</i>)		
Environmental			
Operating Temp:	-25°C to +55°C (-13°F to +131°F)		
Storage Temp:	-40°C to +80°C (-40°F to +176°F)		

Meets Inmarsat, FCC, and CE requirements.

¹ Not shown.

System Diagram

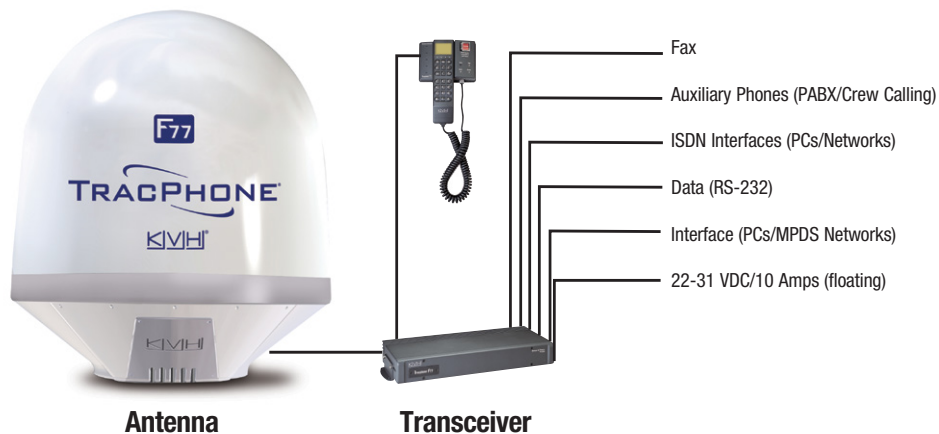

KVH Industries A/S
 EMEA Headquarters
 Kokkedal, Denmark
 Tel: +45.45.160.180 Fax: +45.45.160.181
 Email: info@emea.kvh.com

KVH Industries, Inc.
 World Headquarters
 Middletown, RI U.S.A.
 Tel: +1.401.847.3327 Fax: +1.401.849.0045
 Email: info@kvh.com

KVH Industries Pte Ltd.
 Asia-Pacific Headquarters
 Singapore
 Tel: +65.6513.0290 Fax: +65.6472.3469
 Email: info@apac.kvh.com