



TracPhone® V7HTS

Delivering Streaming Speeds, Unlimited Data, and Dual Channels on the Road

The advanced 60 cm, 3-axis, gyro-stabilized TracPhone V7HTS is a rugged, in-motion, and fully enclosed satellite communications system designed for the most remote field locations and emergency situations. It offers uncompromised download speeds as fast as 10/3 Mbps (down/up), global connections, and crystal-clear voice calling over the mini-VSAT BroadbandSM HTS network.

- State-of-the-art VSAT antenna and belowdecks hardware
- High-performance, three-axis stabilized design for superior tracking
- Exclusive dual channel configuration, with hybrid airtime plans that deliver an unlimited use data channel running at the same time as the high-speed channel
- Global layered HTS network with more than 276 million sq. km (106+ million sq. miles) coverage
- Access to the secure myKVH Portal and powerful mini-VSAT Manager data and network management tools
- Integrated network cybersecurity measures



The TracPhone V7HTS includes the 2U-high **Integrated CommBox Modem (ICM)** with IP-enabled antenna control unit, CommBox™ Network Manager, high-throughput modem, Voice over IP (VoIP) adapter, and built-in Wi-Fi and Ethernet switch. In addition, it provides support for over-the-air system software updates.

TracPhone V7HTS with mini-VSAT Broadband HTS Service

System Specifications

Service	
Network	mini-VSAT Broadband HTS Network
Antenna Type	Ku-band
Service Coverage Area	Seamless Worldwide Regions
Maximum Speed Download/Upload ¹	High-speed data channel: 10 Mbps/3 Mbps
	Unlimited use data channel: Multiple speed-based plans offered.
	Maximum speed offered (UL7 plan) is 8 Mbps/2 Mbps (download/upload).
Abovedecks Equipment	
Antenna Dish Diameter	60 cm (24")
Antenna Unit Dimensions/Weight	66.6 cm D x 79.2 cm h (26.1" D x 31.2" h)/26.1 kg (57.6 lbs)
Elevation/Azimuth Range	-24° to +119°/720° rotation
Temperature	Operating: -30°C to 55°C (-22°F to 131°F); Survival: -35°C to 70°C (-31°F to 158°F)
Humidity	IEC 60945; 40°C (104°F), 95% Humidity (non-condensing)
Rain	Precipitation rate of 1.7mL/min, w/wind speeds up to 100 knots
Heading Input	NMEA 0183 magnetic or true heading
Antenna Unit Power	DC; provided by ICM
ICM to Antenna Unit Communications	14 Conductor Data Cable
L-band RF Cables (customer supplied)	For 5-30 m (15-100 ft.) choose RG-11
	For 30-60 m (101-200 ft.) choose LMR-400-75
	For 60-100 m (201-325 ft.) choose LMR-600-75
Remote Support	Integrated GPRS modem for access by KVH technical support, 3G Capable
Belowdecks Equipment – Integrated CommBox Modem (ICM)	
Dimensions	42.6 cm l x 41.4 cm w x 2U h (16.8" x 16.3" x 2U) rack-mountable with optional mounting provisions ²
Weight	5.1 kg (11.25 lbs)
Temperature	Operating: -15°C to 55°C (5°F to 131°F); Survival: -15°C to 70°C (5°F to 158°F)
Input Power	100-240 VAC, 50-60 Hz auto switching, 250W max
Data Interfaces	4 Ethernet: IEEE 802.3 10BASE-T/100BASE-TX, 100 Mbps; 1 Wi-Fi 802.11; 3 USB ports
Voice Interfaces	2 RJ11 ports for VoIP services
System Options	
CommBox Software Bundles Available	Standard or Enterprise Bundles - see "Featured Options" at kvh.com/v7htsland for details
Built-in Crew Calling Gateway	Available; contact Airtime Services for details
KVH OneCare™ Support Program	Available; see kvh.com/onecare for details
Complete System	
Certification	Complies with the essential requirements of Radio Equipment Directive 2014/53/EU, which includes the safety objectives set out in Low Voltage Directive 2014/35/EU and an adequate level of electromagnetic compatibility as set out in EMC Directive 2014/30/EU.
System Warranty ³	Comprehensive 2-year parts, 2-year labor warranty supported by KVH's worldwide Certified Support Network (CSN)
Part Number	01-0408-15

Meets FCC and CE requirements. Exceeds Inmarsat operational, survival, and shock specifications.

¹TracPhone V7HTS antenna systems and mini-VSAT Broadband service are licensed by the FCC for use in the United States, subject to certain conditions. Although satellites provide coverage over large geographic areas, individual countries have laws that require prior authorization of satellite services within their borders and territorial waters. Please contact KVH for additional details regarding licensing and authorizations in and outside the United States.

²Optional Belowdecks Mounting Case (Part Number 72-0368) available for vehicles without a rack.

³Unless subject to in-country regulations. Restrictions apply. Visit www.kvh.com/warranty for details.

System Diagram




Integrated CommBox Modem (ICM) –

Streamlined belowdecks unit includes: IP-enabled antenna control unit, built-in CommBox Ship/Shore Network Manager, high-throughput modem, Voice over IP adapter, and built-in Wi-Fi and Ethernet switch.



TracPhone V7HTS dome
66.6 cm D, 26.1 kg (26.1" D, 57.6 lbs)

85% smaller in volume than standard VSAT antennas, TracPhone V7HTS is easier and less expensive to install.

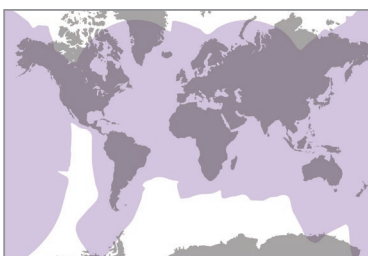

EXPANDED GLOBAL COVERAGE!

TracPhone V7HTS Coverage Map

Coverage maps are representative and may change at any time. Data rates may also vary in different regions. For complete details, choose "TracPhone" at www.kvh.com/minivsathtsmaps and click on the mini-VSAT Broadband HTS coverage map. KVH provides no guarantees of satellite coverage or availability.

V7HTS Ku-band Coverage

kvh.com



World Headquarters

KVH Industries, Inc. · Middletown, RI U.S.A.
+1.401.847.3327 · info@kvh.com

EMEA Headquarters

KVH Industries A/S · Kokkedal, Denmark
+45.45.160.180 · info@emea.kvh.com

Asia-Pacific Headquarters

KVH Industries Pte Ltd. · Singapore
+65.6513.0290 · info@apac.kvh.com